STRUTTURA / *FRAME*



Finitura ottone satinato
Satin brass finish

FRANGE / *FRINGES*



Frange verde salvia
Sage green colour fringes



Frange ruggine
Rust colour fringes



Frange cognac
Cognac colour fringes



Frange sabbia
Sand colour fringes



Frange aragosta
Aragosta (bright orange) fringes



Frange blu nebbia
Fog blue colour fringes

NOTE:
1. Frange ignifughe: CLASSE UNO IM - BS EN 1021.1:2006 CIGARETTE TEST - BS EN 1021.2:2006 BUTANE FLAME TEST - NPFA 260:CLASS 1 IMO A0652(16) - CIGARETTE TEST AND BUTANE TEST
2. Le frange del modello Arcipelago sono lavabili. Conservare il sacchetto per il lavaggio. Immergere, dentro il sacchetto, le frange in acqua a 30° e detersivo. Sciacquare sotto acqua corrente. Appendere ancora bagnato. Nel caso le frange si accorcino dopo il lavaggio, stirare con ferro tiepido (temperatura per seta).
3. Utilizzare un panno asciutto per pulire la struttura della lampada.

NOTES:
1. Fire-resistant fringes: CLASSE UNO IM - BS EN 1021.1:2006 CIGARETTE TEST - BS EN 1021.2:2006 BUTANE FLAME TEST - NPFA 260:CLASS 1 IMO A0652(16) - CIGARETTE TEST AND BUTANE TEST
2. The fringes of the model Arcipelago are washable. Keep the bag for washing. Immerse the fringes inside the bag in water and clean it at the temperature of 30°C. Rinse with flowing water. Hang while still wet. In case the fringes get shorter after washing, iron with warm iron (use the temprature for silk).
3. Use a dry cloth to clean the frame of the lamp.

CAVO - INTERRUTTORE / *CABLE - SWITCH*

Tessuto nero
Black fabric

TA
Pulsante a tre intensità sulla base
Three step push switch on the base
H: 2000 mm
H: 78.7”

SO
L: 2000 mm
L: 78.7”

USA / CABLE - SWITCH

Black fabric

TA
Three step push switch on the base
H: 78.7”

SO
L: 78.7”

FONTE LUMINOSA / *LIGHT SOURCE*

220-240V

Custom LED

1 X 12W
Custom LED
Emission: 1.800 Lm
3.000 K; CRI: >90

SO
Dimmerazione a taglio di fase/Triac - altri sistemi di dimmerazione (DALI e 1-10V) disponibili su richiesta

Phase cut dimming/Triac - alternative dimming systems (DALI and 1-10V) available on demand

CE


Arcipelago TA


110V


Custom LED

1 X 12W
Custom LED
Emission: 1.800 Lm
3.000 K; CRI: >90

SO
Phase cut dimming/Triac - 1-10V dimming systems available on demand

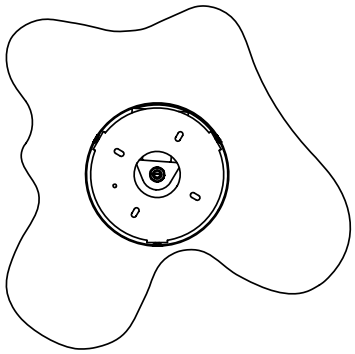

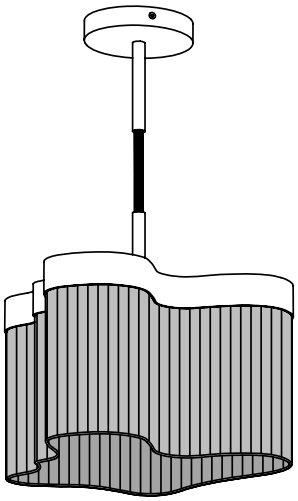

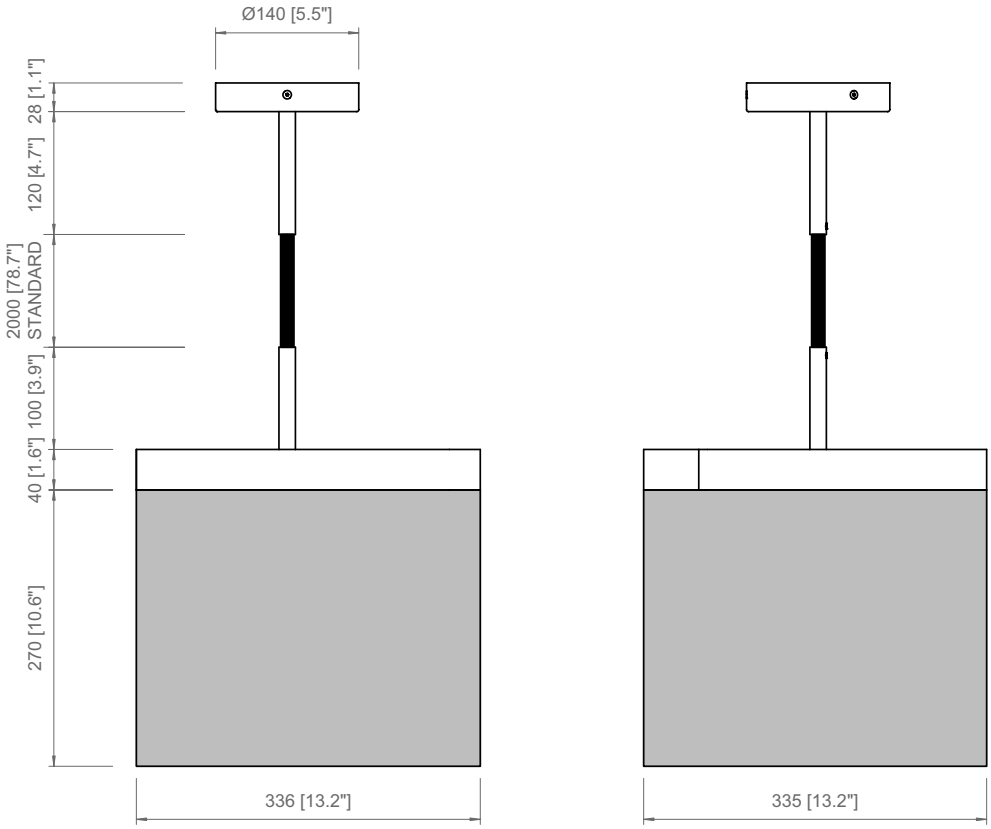

IMBALLI / *PACKAGING*


Box 1

L: 380 mm / 14.9”

L: 420 mm / 16.5”

L: 480 mm / 18.9”

Peso: 6 kg / 13.2 lbs

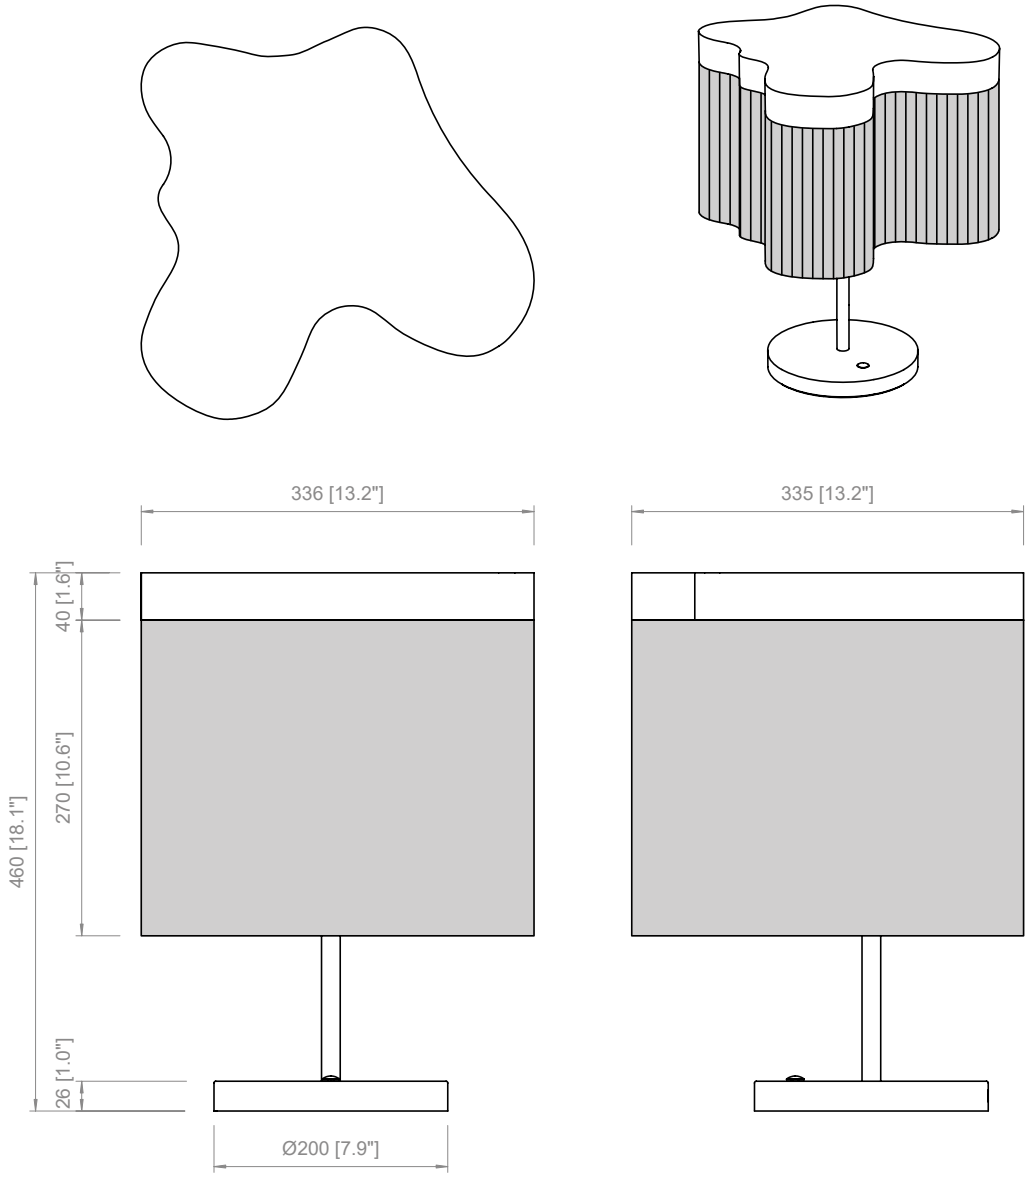

IMBALLI / *PACKAGING*

Box 1

L: 410 mm / 16.1”

L: 410 mm / 16.1”

L: 610 mm / 24”

Peso: 8 kg / 17.6 lbs

Copyright and/or design rights subsist in this drawing. No part of this drawing may be reproduced in any material form (including photocopying or storing in any medium electronic means,
whether or not intentionally and whether or not as part or a larger publication) without the express permission of the copyright owner, Contardi Lighting S.r.l.. Further and without prejudice to the
above, this drawing and all information relating thereto is confidential, and shall not be communicated to a third party without the consent of Contardi lighting srl. Contardi lighting srl asserts
all rights to be identified as the author of the work and otherwise.

WARNING: The doing of any unauthorised act in relation to a copyright work may result in both a civil claim for damages and criminal prosecution.

CONTARDI LIGHTING Srl
ITALY HEADQUARTERS
www.contardi-italia.com / sales@contardi-italia.it

CONTARDI USA Inc
USA BRANCH
www.contardi-usa.com / sales@contardi-usa.com

contardi