STRUTTURA / *FRAME*

Laccato arancione scuro
Dark orange finish

Laccato bianco perla
Pearl white finish

CAVO - INTERRUTTORE / *CABLE - SWITCH*

Tessuto nero
Black fabric

L: 2000 mm
L: 78,7”

Comando a pulsante su base
per indirizzare la luce
Push-button control on the base
to direct the light

USA / CABLE - SWITCH

Black cable

L: 78,7”

Push-button control on the base
to direct the light

FONTE LUMINOSA / *LIGHT SOURCE*

110V

Strip LED

2 x 4W
Strip LED
Emission: 880 Lm
2.700 K; CRI >90

Luce orientabile (180°)
Tre posizioni: sinistra, destra, centrale
Comando sulla base
Adjustable light (180°)
Three positions: left, right and central
Switch on the base

CE

220-240V

Strip LED

2 x 4W
Strip LED
Emission: 880 Lm
2.700 K; CRI >90


Adjustable light (180°)
Three positions: left, right and central
Switch on the base







Beam

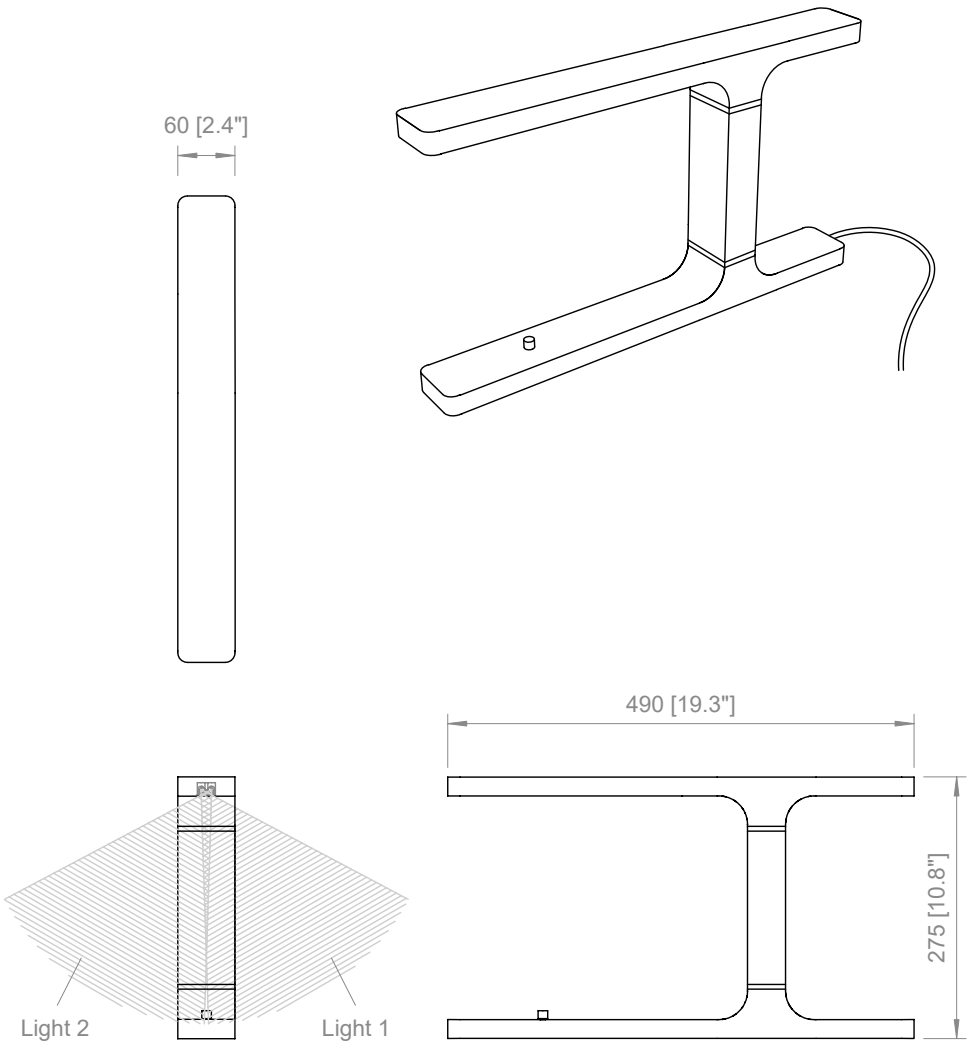

IMBALLI / *PACKAGING*

Box 1

L: 120 mm / 4.7”

P: 410 mm / 16.1”

H: 670 mm / 26.3”

Peso: 5 kg / 11 lbs

Copyright and/or design rights subsist in this drawing. No part of this drawing may be reproduced in any material form (including photocopying or storing in any medium electronic means,
whether or not intentionally and whether or not as part or a larger publication) without the express permission of the copyright owner, Contardi Lighting S.r.l.. Further and without prejudice to the
above, this drawing and all information relating thereto is confidential, and shall not be communicated to a third party without the consent of Contardi lighting srl. Contardi lighting srl asserts
all rights to be identified as the author of the work and otherwise.

WARNING: The doing of any unauthorised act in relation to a copyright work may result in both a civil claim for damages and criminal prosecution.

CONTARDI LIGHTING Srl
ITALY HEADQUARTERS
www.contardi-italia.com / sales@contardi-italia.it

CONTARDI USA Inc
USA BRANCH
www.contardi-usa.com / sales@contardi-usa.com

contardi