STRUTTURA / *FRAME*



Nickel dorato satinato
Satin golden nickel finish



Rame satinato
Satin copper finish

DIFFUSORE / *DIFFUSER*



Plexiglass rigato
Ribbed plexiglass

CAVO - INTERRUTTORE / *CABLE - SWITCH*

Tessuto color sabbia
Sand colour fabric

FL
Dimmerabile a piede

USA / CABLE - SWITCH

Sand color fabric

FL
Foot dimmable

FONTE LUMINOSA / *LIGHT SOURCE*

220-240V

Custom LED

AP SMALL L.30
1 x 13.5W
Custom LED
Emissione / Light emission: 1.250 Lm
2.700 K; CRI: >90
IP20

AP MEDIUM L.60
1 x 27W
Custom LED
Emissione / Light emission: 2.500 Lm
2.700 K; CRI: >90
IP20

AP DOUBLE L.30/L.60
1 x 13.5W + 1 x 27W
Custom LED
Emissione / Light emission: 3.750 Lm
2.700 K; CRI: >90
IP20

AP TRIO
3 x 27W
Custom LED
Emissione / Light emission: 7.500 Lm
2.700 K; CRI: >90
IP20

110V

Custom LED

AP SMALL L.30
1 x 13.5W
Custom LED
Light emission: 1.250 Lm
2.700 K; CRI: >90
IP20

AP SMALL L.30
1 x 27W
Custom LED
Light emission: 2.500 Lm
2.700 K; CRI: >90
IP20

AP DOUBLE L.30/L.60
1 x 13.5W + 1 x 27W
Custom LED
Light emission: 3.750 Lm
2.700 K; CRI: >90
IP20

AP TRIO
3 x 27W
Custom LED
Light emission: 7.500 Lm
2.700 K; CRI: >90
IP20

FONTE LUMINOSA / *LIGHT SOURCE*

220-240V

Custom LED

SO L.90
1 x 40W
Custom LED
Emissione / Light emission: 3.750 Lm
2.700 K; CRI: >90
IP20

SO L.150
1 x 65W
Custom LED
Emissione / Light emission: 6.250 Lm
2.700 K; CRI: >90
IP20

SO TRIO
6 x 40W
Custom LED
Emissione / Light emission: 22.500 Lm
2.700 K; CRI: >90
IP20

FL
5 x 13.5W
Custom LED
Emissione / Light emission: 7.500 Lm
2.700 K; CRI: >90
IP20

AP / SO
Dimmerazione taglio di fase/Triac - altri sistemi di dimmerazione (DALI e 1-10V) disponibili su richiesta

Phase cut dimming/Triac - alternative dimming systems (DALI and 1-10V) available on demand

FL
Dimmerabile a piede
Foot dimmable

CE

110V

Custom LED

SO L.90
1 x 40W
Custom LED
Light emission: 3.750 Lm
2.700 K; CRI: >90
IP20

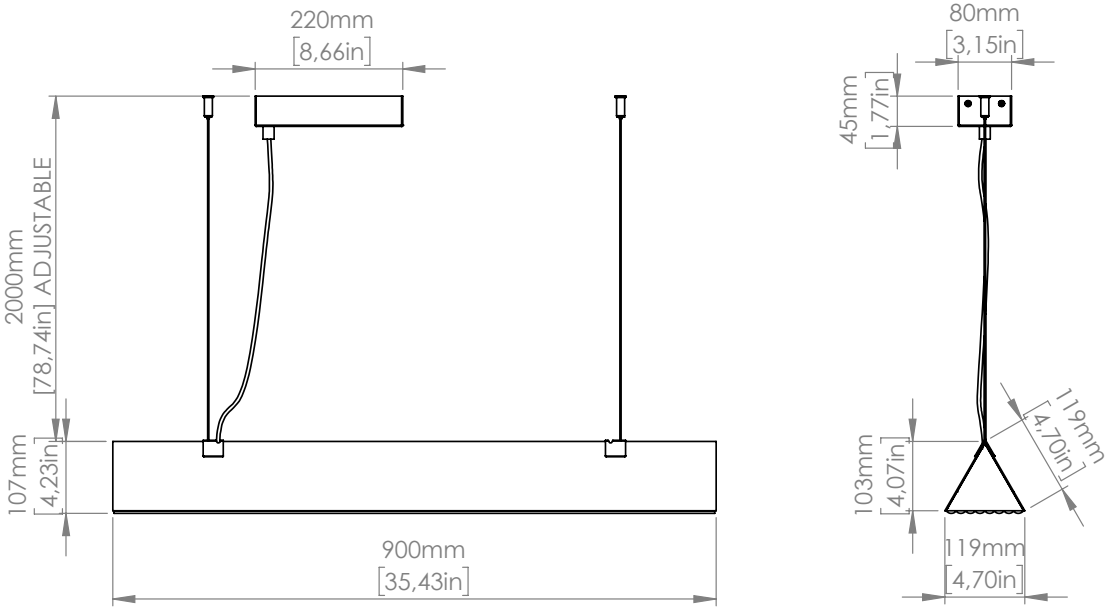
SO L.150
1 x 67.5W
Custom LED
Light emission: 6.250 Lm
2.700 K; CRI: >90
IP20

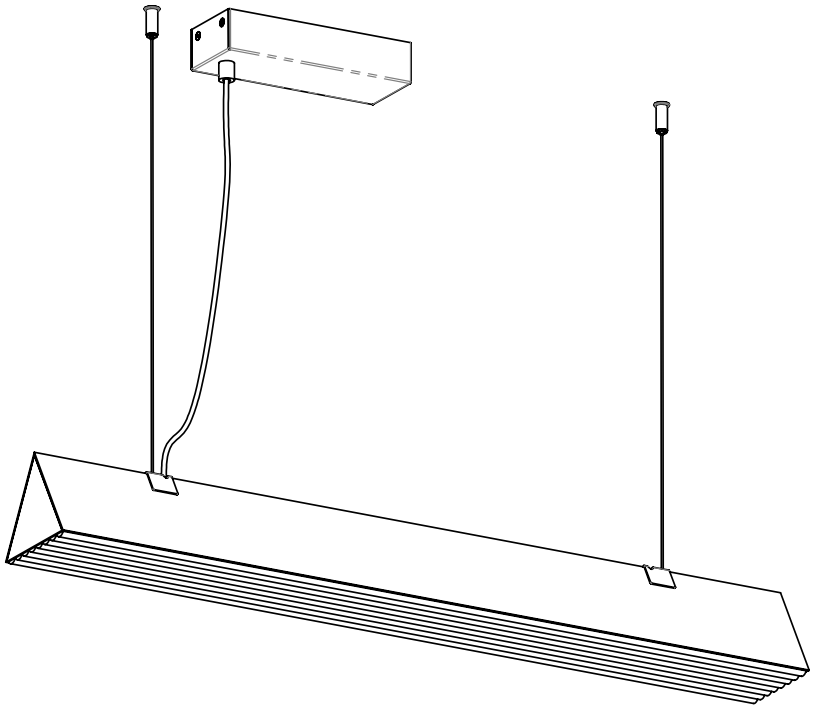
SO TRIO
6 x 40W
Custom LED
Light emission: 22.500 Lm
2.700 K; CRI: >90
IP20

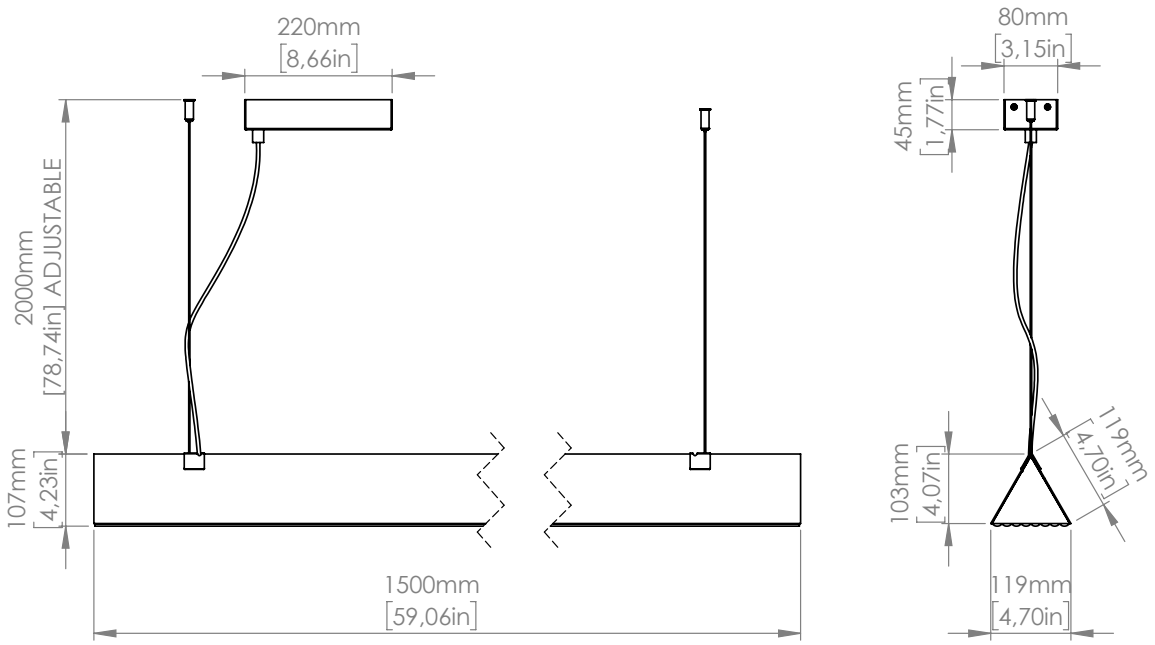
FL
5 x 13.5W
Custom LED
Light emission: 7.500 Lm
2.700 K; CRI: >90
IP20

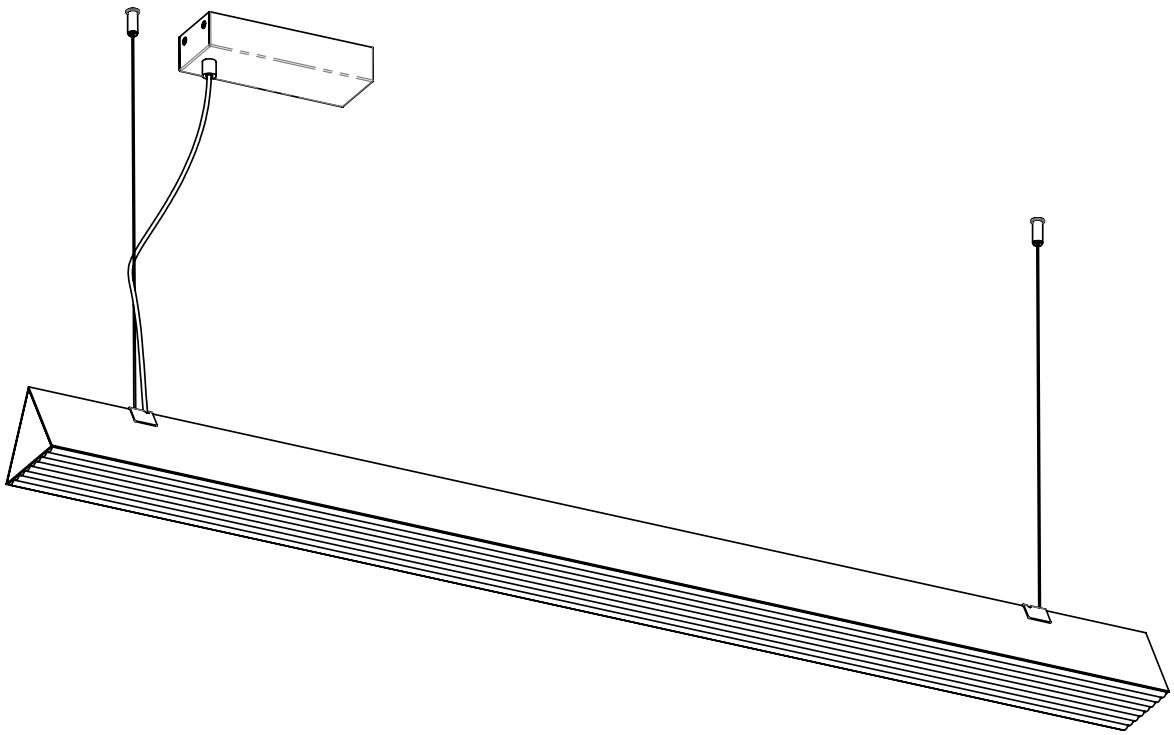
AP / SO
Phase cut/Triac - 1-10V dimming system available on demand

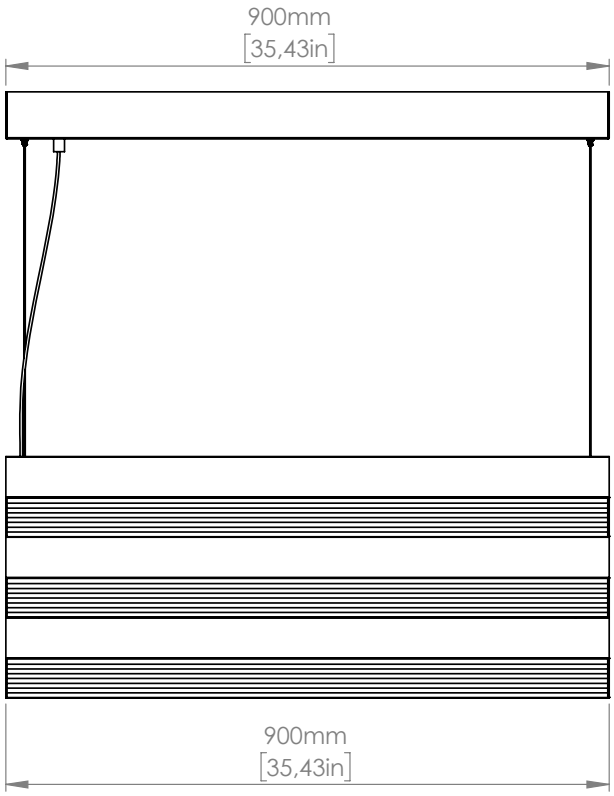
FL
Foot dimmable

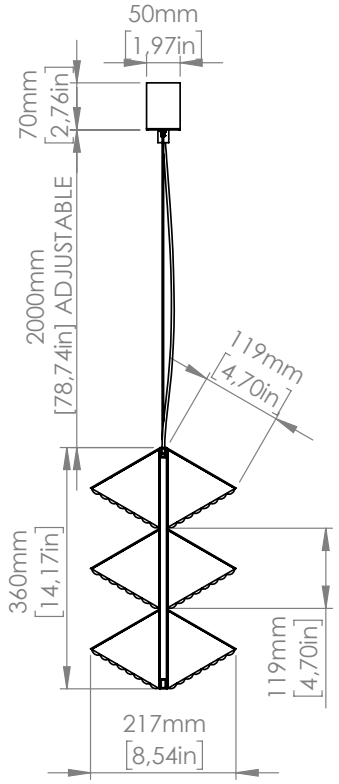

220mm
[8,66in]
2000mm
[78,74in] ADJUSTABLE
107mm
[4,23in]
900mm
[35,43in]
80mm
[3,15in]
45mm
[1,77in]
103mm
[4,07in]
119mm
[4,70in]
119mm
[4,70in]

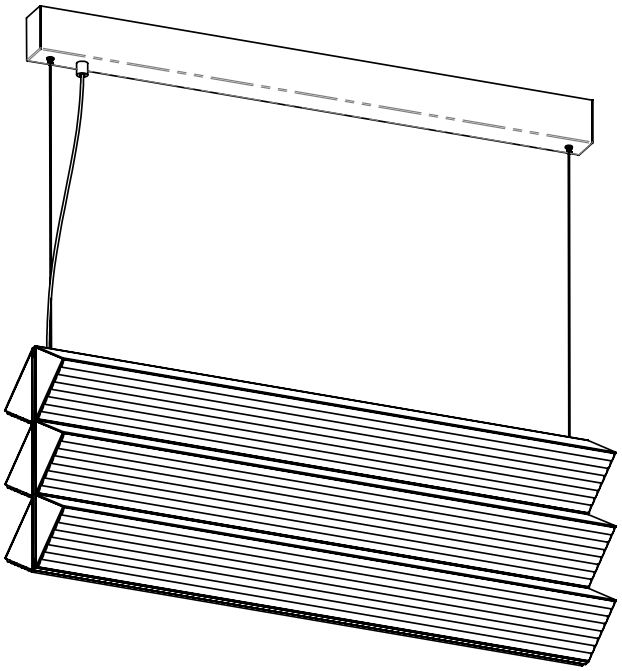



220mm
[8,66in]
2000mm
[78,74in] ADJUSTABLE
107mm
[4,23in]
1500mm
[59,06in]
80mm
[3,15in]
45mm
[1,77in]
103mm
[4,07in]
119mm
[4,70in]
119mm
[4,70in]




900mm
[35,43in]
900mm
[35,43in]


50mm
[1,97in]
70mm
[2,76in]
2000mm
[78,74in] ADJUSTABLE
119mm
[4,70in]
360mm
[14,17in]
119mm
[4,70in]
217mm
[8,54in]



Copyright and/or design rights subsist in this drawing. No part of this drawing may be reproduced in any material form (including photocopying or storing in any medium electronic means,
whether or not intentionally and whether or not as part or a larger publication) without the express permission of the copyright owner, Contardi Lighting S.r.l.. Further and without prejudice to the
above, this drawing and all information relating thereto is confidential, and shall not be communicated to a third party without the consent of Contardi lighting srl. Contardi lighting srl asserts
all rights to be identified as the author of the work and otherwise.

WARNING: The doing of any unauthorised act in relation to a copyright work may result in both a civil claim for damages and criminal prosecution.

CONTARDI LIGHTING Srl
ITALY HEADQUARTERS
www.contardi-italia.com / sales@contardi-italia.it

CONTARDI USA Inc
USA BRANCH
www.contardi-usa.com / office@contardi-usa.com

contardi